


**WE CREATE LIGHT  
FOR PROFESSIONALS**

**CORRA**  
LIGHTING FACTORY

**CORRECT INSTALLATION OF  
LIGHTING LIGHT LINES**

# WHAT TO PAY ATTENTION TO – THE SEQUENCE OF LIGHTING LINE INSTALLATION STEPS


**CORRA**  
LIGHTING FACTORY

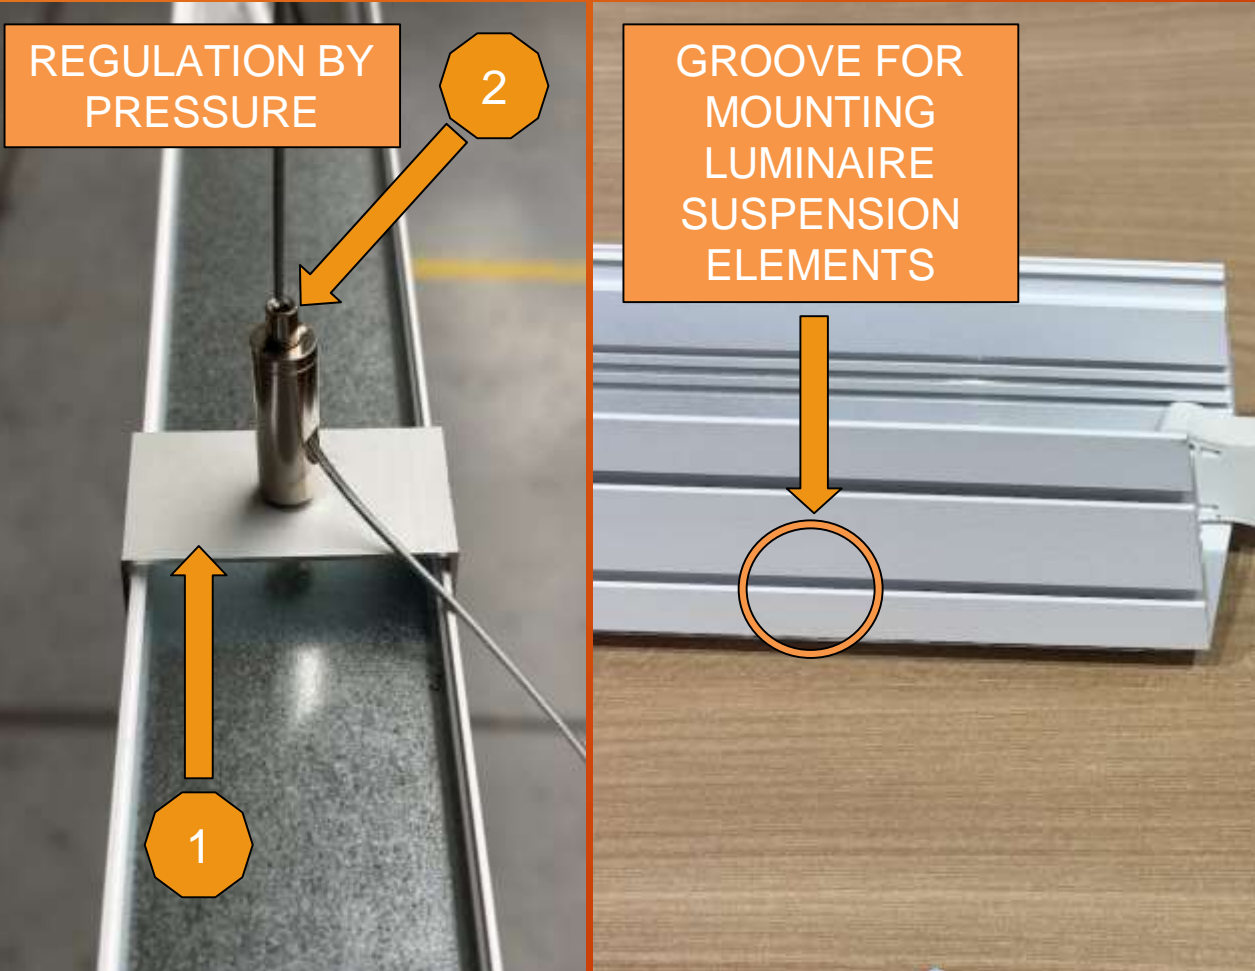

1. INSTALL THE SUSPENSION ELEMENTS FOR THE LIGHTING FIXTURES THAT FORM THE LIGHTING LINE – ELEMENTS 1 AND 2
2. CHECK THAT THE INDIVIDUAL LIGHT FIXTURES HAVE BEEN INSTALLED ON THE SAME LEVEL - MAKE THE NECESSARY ADJUSTMENTS USING THE CABLE LENGTH MECHANISMS - 2

**PAY ATTENTION TO THE ELEMENTS MARKED WITH AN ARROW**

# WHAT TO PAY ATTENTION TO – THE SEQUENCE OF LIGHTING LINE INSTALLATION STEPS

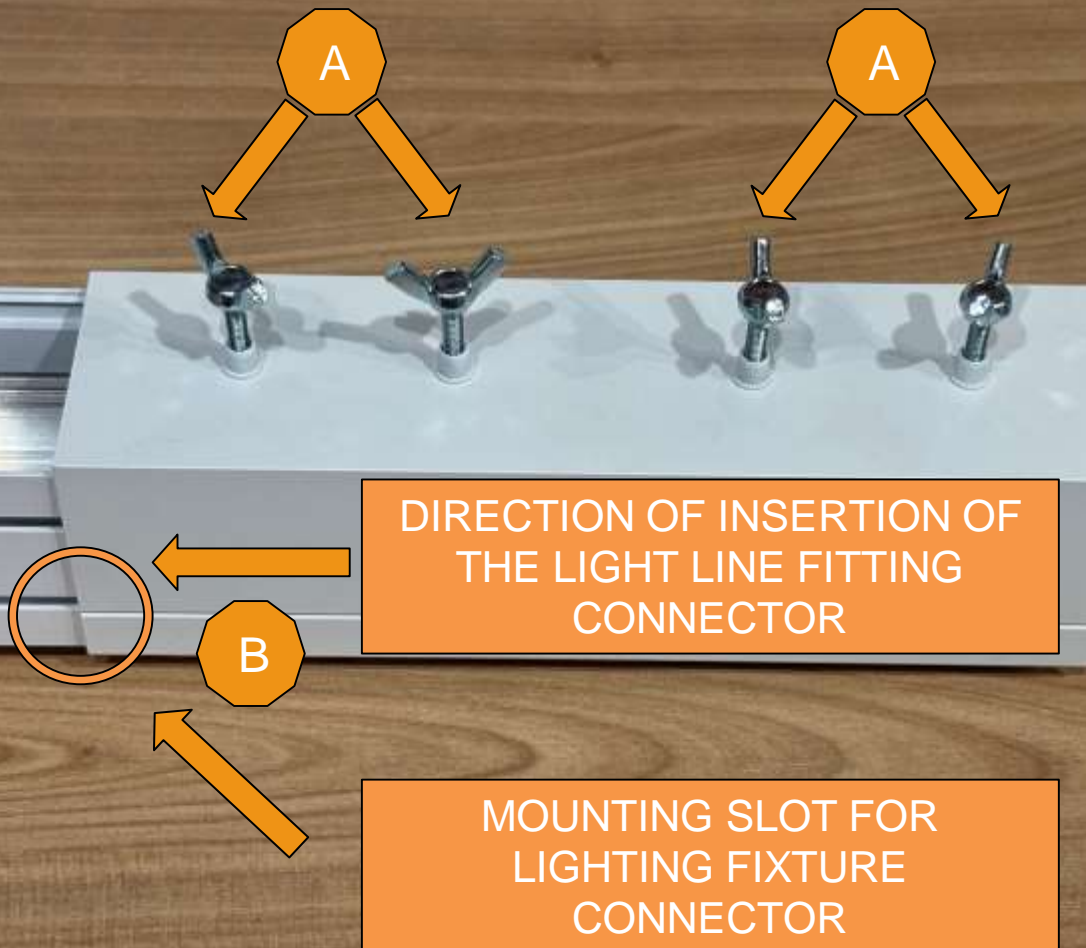


3. LOOSEN THE BUTTERFLY SCREWS – AND THE CONNECTORS OF THE LIGHT FIXTURES FORMING THE LIGHT LINE.
4. INSERT THE LIGHT FITTING CONNECTOR INTO THE MOUNTING GROOVE - B

**PAY ATTENTION TO THE ELEMENTS MARKED WITH AN ARROW**

# WHAT TO PAY ATTENTION TO – THE SEQUENCE OF LIGHTING LINE INSTALLATION STEPS

**CORRA**  
LIGHTING FACTORY


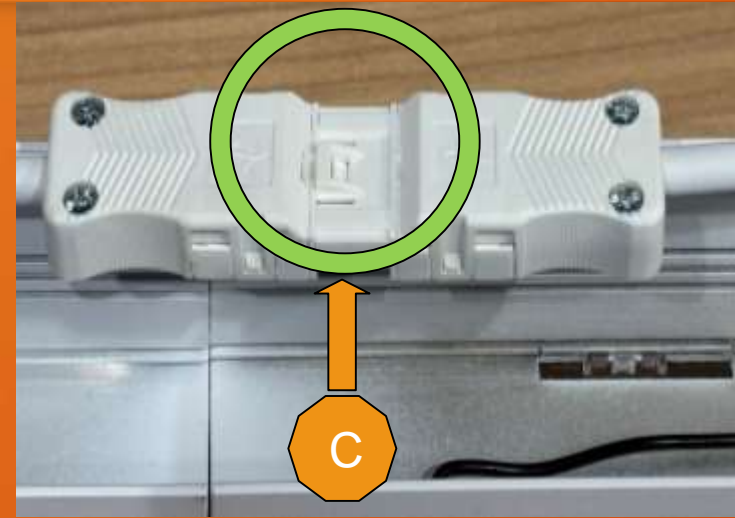


5. CONNECT THE LINEAR FITTING PLUGS. ENSURE THAT THE CONNECTION SECURITY – C OF THE PLUGS IS CORRECT.
6. INSERT THE ALUMINIUM 'D' CONNECTOR ELEMENT OF THE LIGHTING LINE INTO THE LUMINAIRE PROFILE, PAYING ATTENTION TO THE CORRECT POSITION OF ITS SHAPE.

**PAY ATTENTION TO THE ELEMENTS MARKED WITH AN ARROW**

# WHAT TO PAY ATTENTION TO – THE SEQUENCE OF LIGHTING LINE INSTALLATION STEPS

**CORRA**  
LIGHTING FACTORY

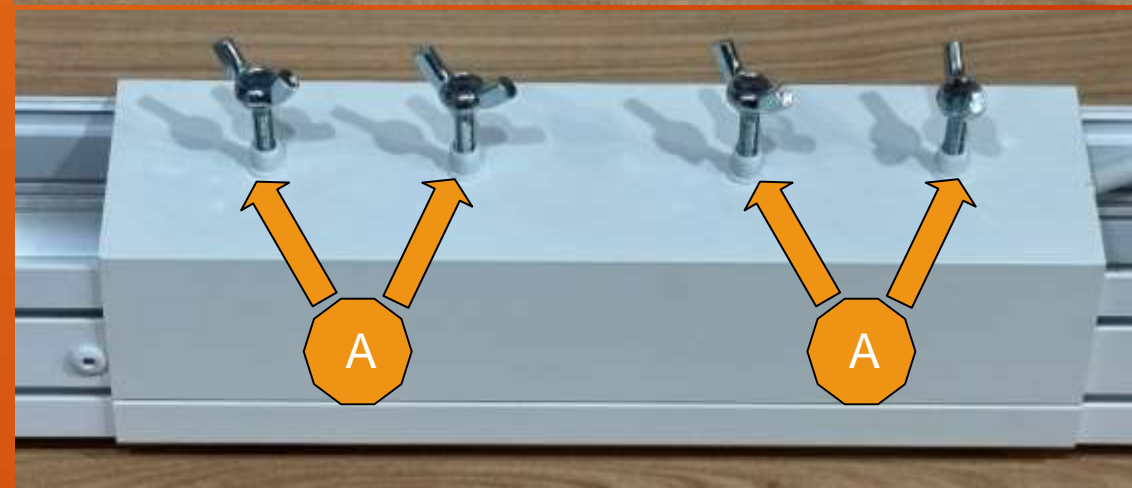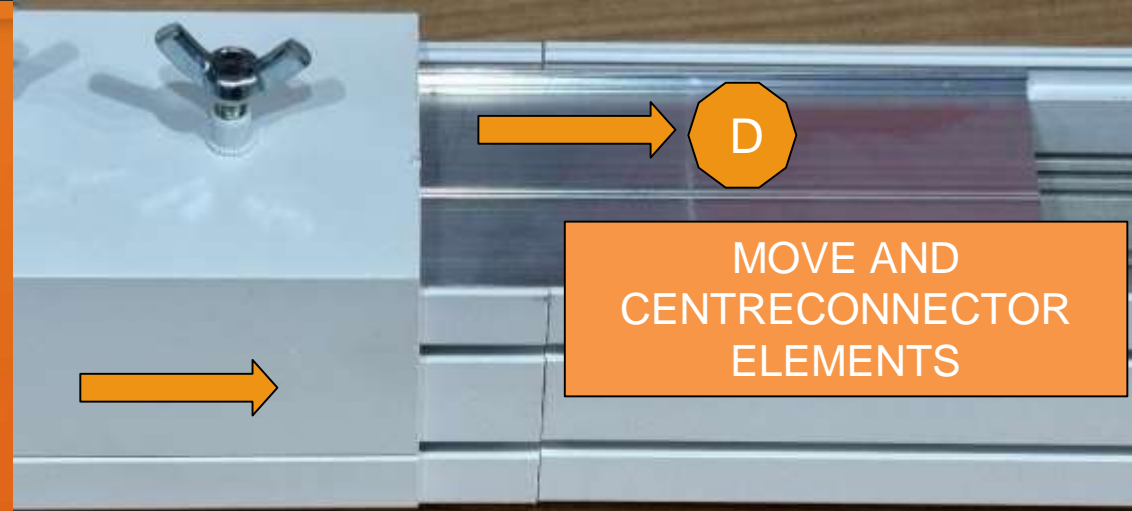

7. MOVE THE ALUMINIUM ELEMENT OF THE CONNECTOR AND CENTRE IT ON THE JOINT BETWEEN THE FITTINGS.
8. MOVE THE LINEAR LUMINAIRE CONNECTOR AND CENTRE IT ON THE LUMINAIRE CONNECTION
9. TIGHTEN THE BUTTERFLY SCREWS TO THE ALUMINIUM CONNECTOR ELEMENT OF THE FITTINGS TO OBTAIN A PERMANENT CONNECTION OF THE LINEAR FITTINGS OF THE LIGHT LINE.

**PAY ATTENTION TO THE ELEMENTS MARKED WITH AN ARROW**



# WHAT TO PAY ATTENTION TO – THE SEQUENCE OF LIGHTING LINE INSTALLATION STEPS

**CORRA**  
LIGHTING FACTORY

REMEMBER:

THE BEGINNING AND END OF THE FITTING STARTING AND ENDING THE LIGHT LINE SHOULD BE FINISHED BY INSTALLING A CAP, WHICH IS INCLUDED WITH EACH LINEAR LUMINAIRE THAT IS PART OF THE LIGHT LINE.

**PAY ATTENTION TO THE  
ELEMENTS MARKED WITH AN ARROW**

