


SPOTLIGHT

SPOTLIGHT LIDER D MINIS 935 25W 60° GREY PREMIUM WHITE ON/OFF

Article number: N006-K0001-HE935-HA-M60-ZE51_650-S2-AA1

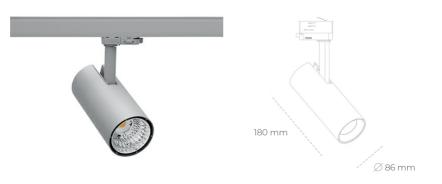

Light colour3500 [K] PREMIUM WHTECRI90Led chip flux3777 [lm]Luminous flux3399 [lm]System power25 [W]Luminaire Efficiency136 [lm/W]Beam angle60°ControllerON/OFFMacAdam3 SDCM	LED	COB
CRI90Led chip flux3777 [lm]Luminous flux3399 [lm]System power25 [W]Luminaire Efficiency136 [lm/W]Beam angle60°Controller60°MacAdamController	Light colour	
Led chip flux3777 [lm]Luminous flux3399 [lm]System power25 [W]Luminaire Efficiency136 [lm/W]Beam angle60°Controller60°MacAdamON/OFF	CRI	
Luminous flux3399 [lm]System power25 [W]Luminaire Efficiency136 [lm/W]Beam angle60°ControllerON/OFFMacAdamON/OFF	Led chip flux	
System power3399 [lm]Luminaire Efficiency25 [W]Beam angle136 [lm/W]Controller60°MacAdamON/OFF	Luminous flux	3777 [lm]
Luminaire Efficiency 25 [W] Beam angle 136 [lm/W] Controller 60° MacAdam ON/OFF		3399 [lm]
136 [lm/W] Beam angle 60° Controller MacAdam	System power	25 [W]
Beam angle 60° Controller ON/OFF	Luminaire Efficiency	126 [lm/\\/]
Controller ON/OFF MacAdam	Beam angle	L 1
ON/OFF	Controller	60°
		ON/OFF
	MacAdam	3 SDCM

Spotlight LED

Compact track mounted LED spotlight. Aluminium housing. Ceiling base installation possible. Available in white, black and grey. Any RAL palette colour available on enquiry. Reflector beams available: 15°, 23°, 38°, 45° and 60°. Maximum power is 23W.

LUMINAIRE

Weight	0,81 [kg]
Protection rating IP , IK , class	IP 20, IK 1,
Luminaire colour	GREY
Cover	Plastic
Operating voltage	220-240V 50-60Hz

Note: All data are typical values. Tolerance of measurements +/-10% System features may change with product improvements due to technical advances.

OPTIONS

RAL colours on inquiry, honeycomb louver on inquiry , Casambi on inquiry, DALI on inquiry, Phase-cut dimming on inquiry.





+48 32 388 80 00

www.cora.pl cora@cora.pl



Street: Ignatza Hakuby 18 41-914 Bytom, Polska Generated: 02.06.2024