


## DOWNLIGHT LIDER Z 930 21W 60° GREY HI EFFICIENT ON/OFF

Article number: N202-K0001-BB930-H5-G60-ZA02\_550-S1-###

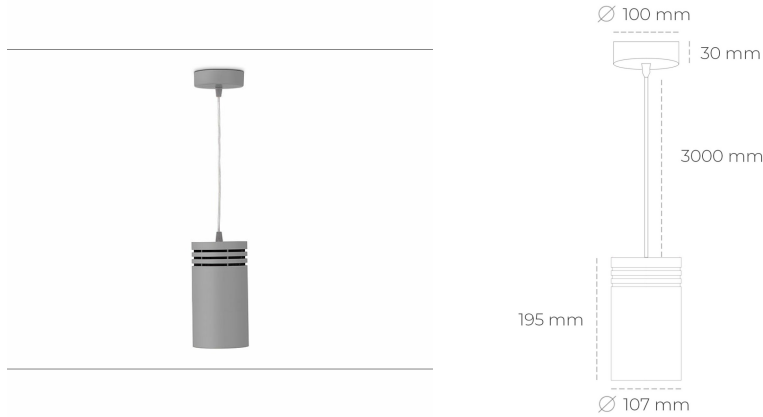

LED	COB
Light colour	3000 [K] HI EFFICIENT
CRI	90
Led chip flux	3487 [lm]
Luminous flux	3138 [lm]
System power	21 [W]
Luminaire Efficiency	149 [lm/W]
Beam angle	60°
Controller	ON/OFF
MacAdam	3 SDCM

### Downlight LED

Suspended LED downlight. Aluminium housing. Plastic cover included. Available in white, black and grey. Any RAL palette colour available on enquiry. Power cord - 300cm. Reflector beams available: 15°, 23° 38°, 34° and 60°. Maximum power is 31W.

### LUMINAIRE

Weight	1,17 [kg]
Protection rating IP , IK , class	IP 20, IK 1,
Luminaire colour	GREY
Cover	Plastic
Operating voltage	220-240V 50-60Hz

Note: All data are typical values. Tolerance of measurements +/-10% System features may change with product improvements due to technical advances.

### OPTIONS

RAL colours on inquiry, honeycomb louver on inquiry , Casambi on inquiry, DALI on inquiry, Phase-cut dimming on inquiry.



Generated: 26.06.2024



+48 32 388 80 00



www.cora.pl  
cora@cora.pl



Street: Ignatza Hakuby 18  
41-914 Bytom, Polska