


## DOWNLIGHT LIDER M 935 14W 15° BLACK HI EFFICIENT ON/OFF

Article number: N203-K0002-BB935-H5-M15-ZC01\_350-S2-###

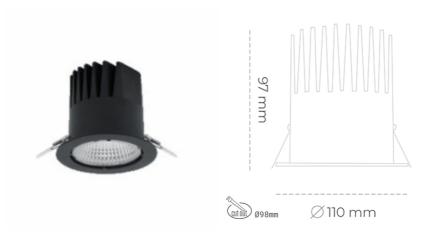

LED	COB
Light colour	3500 [K] HI EFFICIENT
CRI	90
Led chip flux	2174 [lm]
Luminous flux	
System power	1956 [lm]
Luminaire Efficiency	14 [W]
Beam angle	140 [lm/W]
Controller	15°
	ON/OFF
MacAdam	3 SDCM

## **Downlight LED**

LED downlight for drop ceiling istallation. Aluminium housing. Plastic cover included. Available in white, black and grey. Any RAL palette colour available on enquiry. Reflector beam available: 15°, 23°, 38° and 60°. Maximum power is 27W

## **LUMINAIRE**

Weight 0,61 [kg]

Protection rating IP , IK , class IP 20, IK 1,

Luminaire colour BLACK

Cover Plastic

Operating voltage 220-240V 50-60Hz

Note: All data are typical values. Tolerance of measurements +/-10% System features may change with product improvements due to technical advances.

## **OPTIONS**

RAL colours on inquiry, Casambi on inquiry, DALI on inquiry, Phase-cut dimming on inquiry.



Generated: 17.05.2024



+48 32 388 80 00



www.cora.pl cora@cora.pl



Street: Ignatza Hakuby 18 41-914 Bytom, Polska