


## DOWNLIGHT LIDER M 940 27W 38° BLACK HI EFFICIENT ON/OFF

Article number: N203-K0002-BB940-H5-M38-ZC01\_700-S2-###

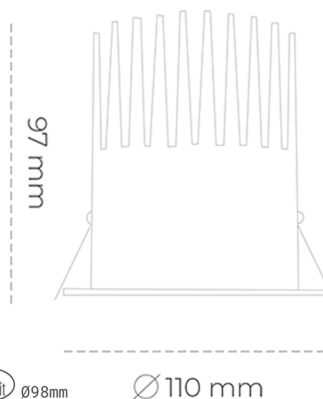

|                      |                       |
|----------------------|-----------------------|
| LED                  | COB                   |
| Light colour         | 4000 [K] HI EFFICIENT |
| CRI                  | 90                    |
| Led chip flux        | 4385 [lm]             |
| Luminous flux        | 3946 [lm]             |
| System power         | 27 [W]                |
| Luminaire Efficiency | 146 [lm/W]            |
| Beam angle           | 38°                   |
| Controller           | ON/OFF                |
| MacAdam              | 3 SDCM                |

### Downlight LED

LED downlight for drop ceiling installation. Aluminium housing. Plastic cover included. Available in white, black and grey. Any RAL palette colour available on enquiry. Reflector beam available: 15°, 23°, 38° and 60°. Maximum power is 27W.

### LUMINAIRE

|                                   |                  |
|-----------------------------------|------------------|
| Weight                            | 0,61 [kg]        |
| Protection rating IP , IK , class | IP 20, IK 1,     |
| Luminaire colour                  | BLACK            |
| Cover                             | Plastic          |
| Operating voltage                 | 220-240V 50-60Hz |

Note: All data are typical values. Tolerance of measurements +/-10% System features may change with product improvements due to technical advances.

### OPTIONS

RAL colours on inquiry, Casambi on inquiry, DALI on inquiry, Phase-cut dimming on inquiry.



Generated: 17.05.2024



+48 32 388 80 00



www.cora.pl  
cora@cora.pl



Street: Ignatza Hakuby 18  
41-914 Bytom, Polska