


## DOWNLIGHT LIDER M 930 25W 45° BLACK CRI97 ON/OFF

Article number: N203-K0002-HI930-H5-M45-ZC02\_650-S2-###

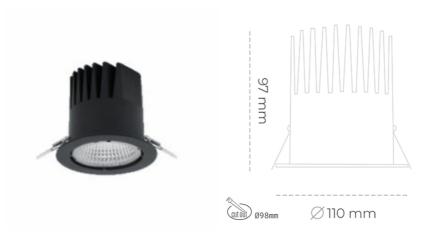

LED COB

Light colour 3000 [K] CRI97

CRI 90

 Led chip flux
 2797 [lm]

 Luminous flux
 2517 [lm]

 System power
 25 [W]

 Luminaire Efficiency
 101 [lm/W]

 Beam angle
 45°

Controller ON/OFF
MacAdam 3 SDCM

## LUMINAIRE

 Weight
 0,61 [kg]

 Protection rating IP , IK , class
 IP 20, IK 1,

 Luminaire colour
 BLACK

 Cover
 Plastic

 Operating voltage
 220-240V 50-60Hz

## Downlight LED

LED downlight for drop ceiling istallation. Aluminium housing. Plastic cover included. Available in white, black and grey. Any RAL palette colour available on enquiry. Reflector beam available: 15°, 23°, 38° and 60°. Maximum power is 27W.

Note: All data are typical values. Tolerance of measurements +/-10% System features may change with product improvements due to technical advances.

## **OPTIONS**

RAL colours on inquiry, Casambi on inquiry, DALI on inquiry, Phase-cut dimming on inquiry.



Generated: 17.05.2024



+48 32 388 80 00



www.cora.pl cora@cora.pl



Street: Ignatza Hakuby 18 41-914 Bytom, Polska