


## DOWNLIGHT SHERIFF M 930 19W 45° WHITE HI EFFICIENT ON/OFF

Article number: N204-K0003-BB930-H8-H45-ZC01\_500-S6-###

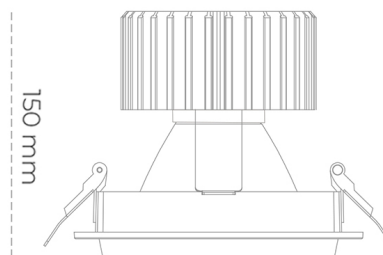

Ø140mm

Ø155 mm

LED	COB
Light colour	3000 [K] HI EFFICIENT
CRI	90
Led chip flux	3184 [lm]
Luminous flux	2547 [lm]
System power	19 [W]
Luminaire Efficiency	134 [lm/W]
Beam angle	45°
Controller	ON/OFF
MacAdam	3 SDCM

### Downlight LED

LED downlight for drop ceiling installation. Aluminium housing. Glass cover included. Available in white, black and grey. Any RAL palette colour available on enquiry. Reflector beams available: 15°, 30°, 45° and 60°. Maximum power is 37W.

### LUMINAIRE

Weight	1,03 [kg]
Protection rating IP , IK , class	IP 20, IK 3,
Luminaire colour	WHITE
Cover	Glass
Operating voltage	220-240V 50-60Hz

Note: All data are typical values. Tolerance of measurements +/-10% System features may change with product improvements due to technical advances.

### OPTIONS

RAL colours on enquiry, honeycomb louver on enquiry , Casambi on enquiry, DALI on enquiry, Phase-cut dimming on enquiry.



Generated: 21.05.2024



+48 32 388 80 00



www.cora.pl  
cora@cora.pl



Street: Ignatza Hakuby 18  
41-914 Bytom, Polska