

## DOWNLIGHT SHERIFF Z BATWING 825 25W 90°x50° WHITE BREAD ON/OFF

СОВ

80

3042 [lm]

2433 [lm]

25 [W] 97 [lm/W]


90°x50°

ON/OFF

3 SDCM

2500 [K] BREAD

Article number: N207-K0003-VF825-H8-ZBW-ZC02\_650-B1-###

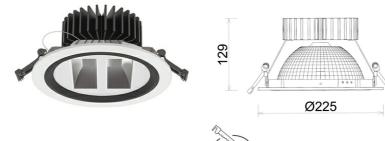

(cut out) Ø210mm

Downli	abt	
DOWIII	ynu	LED

LED downlight for drop ceiling installation. Aluminium housing. Glass cover included. Available in white, black and grey. Any RAL palette colour available on enquiry. Special double asymmetric optics. Maximum power is 37W.

LU	М	NA	IRE

Controller

MacAdam

Light colour

Led chip flux Luminous flux

System power

Luminaire Efficiency Beam angle

CRI

Weight	1,23 [kg]
Protection rating IP , IK , class	IP 20, IK 3,
Luminaire colour	WHITE
Cover	Plastic
Operating voltage	220-240V 50-60Hz

Note: All data are typical values. Tolerance of measurements +/-10% System features may change with product improvements due to technical advances.

## **OPTIONS**

RAL colours on enquiry, Casambi on enquiry, DALI on enquiry, Phase-cut dimming on enquiry.





+48 32 388 80 00

www.cora.pl cora@cora.pl



Street: Ignatza Hakuby 18 41-914 Bytom, Polska Generated: 29.06.2024