


DOWNLIGHT HEKTOR 2 935 36W 30° GREY HI EFFICIENT ON/OFF

Article number: N213-K0001-BB935-H8-H30-ZC03_950-S6-###

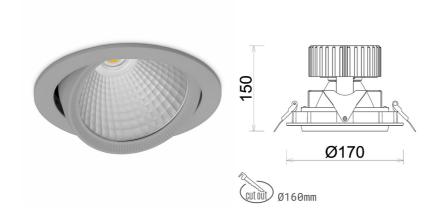

COB 3500 [K] HI EFFICIENT Light colour CRI 90 Led chip flux 5518 [lm] Luminous flux 4414 [lm] System power 36 [W] Luminaire Efficiency 123 [lm/W] Beam angle 30° Controller ON/OFF MacAdam 3 SDCM

Downlight LED

LED downlight for drop ceiling istallation. Aluminium housing. Available in white, black and grey. Any RAL palette colour available on enquiry. Housing enables adjustment in two axis planes. Glass cover included. Reflector beams available: 15°, 30°, 45° and 60°. Maximum power is 37W

LUMINAIRE

 Weight
 1,1 [kg]

 Protection rating IP , IK , class
 IP 20, IK 3,

 Luminaire colour
 GREY

 Cover
 Glass

 Operating voltage
 220-240V 50-60Hz

Note: All data are typical values. Tolerance of measurements +/-10% System features may change with product improvements due to technical advances.

OPTIONS

RAL colours on inquiry, honeycomb louver on inquiry , Casambi on inquiry, DALI on inquiry, Phase-cut dimming on inquiry.



Generated: 18.05.2024



+48 32 388 80 00



www.cora.pl cora@cora.pl



Street: Ignatza Hakuby 18 41-914 Bytom, Polska