


## DOWNLIGHT HEKTOR 2 957 31W 15° GREY SPECIAL ON/OFF

Article number: N213-K0001-CC957-H8-H15-ZC03\_800-S6-###

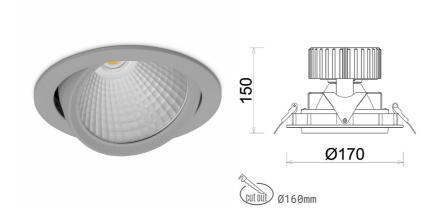

LED COB

Light colour 5700 [K] SPECIAL

CRI 90

Led chip flux 3934 [lm]

Luminous flux 3147 [lm]

System power 31 [W]

Luminaire Efficiency 102 [lm/W]

Beam angle 15°

Controller ON/OFF
MacAdam 3 SDCM

## LUMINAIRE

Weight 1,1 [kg]
Protection rating IP, IK, class IP 20, IK 3,
Luminaire colour GREY

Cover Glass

Operating voltage 220-240V 50-60Hz

## **Downlight LED**

LED downlight for drop ceiling istallation. Aluminium housing. Available in white, black and grey. Any RAL palette colour available on enquiry. Housing enables adjustment in two axis planes. Glass cover included. Reflector beams available: 15°, 30°, 45° and 60°. Maximum power is 37W

Note: All data are typical values. Tolerance of measurements +/-10% System features may change with product improvements due to technical advances.

## **OPTIONS**

RAL colours on inquiry, honeycomb louver on inquiry , Casambi on inquiry, DALI on inquiry, Phase-cut dimming on inquiry.



Generated: 18.05.2024



+48 32 388 80 00



www.cora.pl cora@cora.pl



Street: Ignatza Hakuby 18 41-914 Bytom, Polska