


DOWNLIGHT HEKTOR 2 957 35W 30° GREY SPECIAL ON/OFF

Article number: N213-K0001-CC957-H8-H30-ZC03_900-S6-###

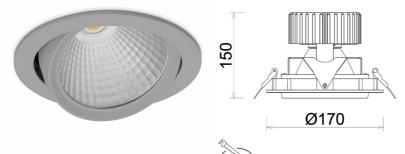

Ø160mm

UMINAIRE	
MacAdam	3 SDCM
Controller	ON/OFF
Beam angle	30°
Luminaire Efficiency	100 [lm/W]
System power	35 [W]
Luminous flux	3499 [lm]
Led chip flux	4374 [lm]
CRI	90
Light colour	5700 [K] SPECIAL
LED	COB

Downlight LED

LED downlight for drop ceiling istallation. Aluminium housing. Available in white, black and grey. Any RAL palette colour available on enquiry. Housing enables adjustment in two axis planes. Glass cover included. Reflector beams available: 15°, 30°, 45° and 60°. Maximum power is 37W

LUN

Weight	1,1 [kg]
Protection rating IP , IK , class	IP 20, IK 3,
Luminaire colour	GREY
Cover	Glass
Operating voltage	220-240V 50-60Hz

Note: All data are typical values. Tolerance of measurements +/-10% System features may change with product improvements due to technical advances.

OPTIONS

RAL colours on inquiry, honeycomb louver on inquiry , Casambi on inquiry, DALI on inquiry, Phase-cut dimming on inquiry.





+48 32 388 80 00

www.cora.pl cora@cora.pl



Street: Ignatza Hakuby 18 41-914 Bytom, Polska

Generated: 18.05.2024