


## DOWNLIGHT HEKTOR 2 930 37W 15° GREY PREMIUM WHITE ON/OFF

Article number: N213-K0001-HE930-HA-H15-ZC03\_950-S6-###

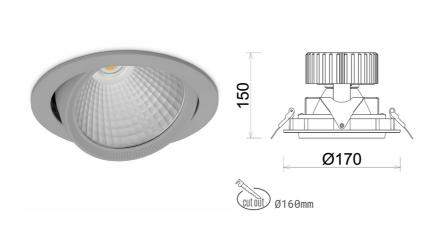

COB

3000 [K] PREMIUM WHITE Light colour

CRI

90 Led chip flux 3911 [lm] Luminous flux 3128 [lm] System power 37 [W] Luminaire Efficiency 85 [lm/W] Beam angle 15° Controller

ON/OFF MacAdam 3 SDCM

## LUMINAIRE

Weight 1,1 [kg] Protection rating IP, IK, class IP 20, IK 3, GREY Luminaire colour Cover Operating voltage 220-240V 50-60Hz

## **Downlight LED**

LED downlight for drop ceiling istallation. Aluminium housing. Available in white, black and grey. Any RAL palette colour available on enquiry. Housing enables adjustment in two axis planes. Glass cover included. Reflector beams available: 15°, 30°, 45° and 60°. Maximum power is 37W

Note: All data are typical values. Tolerance of measurements +/-10% System features may change with product improvements due to technical advances.

## **OPTIONS**

RAL colours on inquiry, honeycomb louver on inquiry , Casambi on inquiry, DALI on inquiry, Phase-cut dimming on inquiry.





+48 32 388 80 00



www.cora.pl cora@cora.pl



Street: Ignatza Hakuby 18 41-914 Bytom, Polska