

## DOWNLIGHT

## DOWNLIGHT HEKTOR 2 930 25W 60° GREY CRI97 ON/OFF

СОВ

90

2797 [lm]

2237 [lm]

89 [lm/W]

ON/OFF


3 SDCM

25 [W]

60°

3000 [K] CRI97

Article number: N213-K0001-HI930-H8-H60-ZC02\_650-S6-###

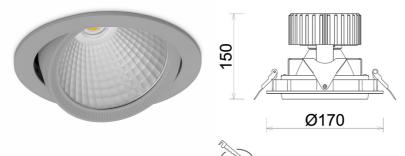

cutout Ø160mm

D	own	light	LED

LED downlight for drop ceiling istallation. Aluminium housing. Available in white, black and grey. Any RAL palette colour available on enquiry. Housing enables adjustment in two axis planes. Glass cover included. Reflector beams available: 15°, 30°, 45° and 60°. Maximum power is 37W

ш	٨	/11	M	Λ	IP	F

Light colour CRI

Led chip flux Luminous flux

System power

Beam angle

Controller

MacAdam

Luminaire Efficiency

Weight	1,1 [kg]			
Protection rating IP , IK , class	IP 20, IK 3,			
Luminaire colour	GREY			
Cover	Glass			
Operating voltage	220-240V 50-60Hz			

Note: All data are typical values. Tolerance of measurements +/-10% System features may change with product improvements due to technical advances.

## OPTIONS

RAL colours on inquiry, honeycomb louver on inquiry , Casambi on inquiry, DALI on inquiry, Phase-cut dimming on inquiry.





+48 32 388 80 00

www.cora.pl cora@cora.pl



Street: Ignatza Hakuby 18 41-914 Bytom, Polska Generated: 26.06.2024