


DOWNLIGHT HEKTOR 2 940 35W 15° GREY PREMIUM WHITE ON/OFF

Article number: N213-K0001-PW940-HA-H15-ZC03_900-S6-###

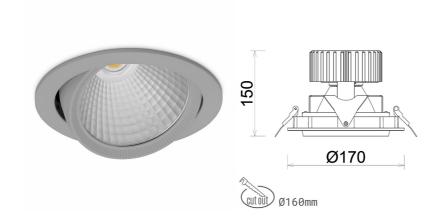

LED COB

Light colour 4000 [K] PREMIUM WHITE

CRI 90

Led chip flux 4545 [lm]
Luminous flux 3636 [lm]

System power 35 [W]

Luminaire Efficiency

104 [Im/W]

Beam angle

Controller

MacAdam

15°

ON/OFF

3 SDCM

LUMINAIRE

Weight 1,1 [kg]
Protection rating IP , IK , class IP 20, IK 3,
Luminaire colour GREY

Cover Glass

Operating voltage 220-240V 50-60Hz

Downlight LED

LED downlight for drop ceiling istallation. Aluminium housing. Available in white, black and grey. Any RAL palette colour available on enquiry. Housing enables adjustment in two axis planes. Glass cover included. Reflector beams available: 15°, 30°, 45° and 60°. Maximum power is 37W

Note: All data are typical values. Tolerance of measurements +/-10% System features may change with product improvements due to technical advances.

OPTIONS

RAL colours on inquiry, honeycomb louver on inquiry , Casambi on inquiry, DALI on inquiry, Phase-cut dimming on inquiry.



Generated: 18.05.2024



+48 32 388 80 00



www.cora.pl cora@cora.pl



Street: Ignatza Hakuby 18 41-914 Bytom, Polska