


DOWNLIGHT HEKTOR 2 940 11W 45° GREY PREMIUM WHITE ON/OFF

COB

Article number: N213-K0001-PW940-HA-H45-ZC01_250-S6-###

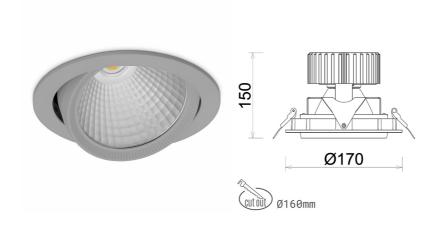

 Light colour
 4000 [K] PREMIUM WHITE

 CRI
 90

 Led chip flux
 1343 [Im]

 Luminous flux
 1074 [Im]

 System power
 11 [W]

 Luminaire Efficiency
 98 [Im/W]

 Beam angle
 450

Controller

MacAdam

45°

ON/OFF

3 SDCM

LUMINAIRE

Weight 1,1 [kg]
Protection rating IP , IK , class IP 20, IK 3,
Luminaire colour GREY
Cover Glass
Operating voltage 220-240V 50-60Hz

Downlight LED

LED downlight for drop ceiling istallation. Aluminium housing. Available in white, black and grey. Any RAL palette colour available on enquiry. Housing enables adjustment in two axis planes. Glass cover included. Reflector beams available: 15°, 30°, 45° and 60°. Maximum power is 37W

Note: All data are typical values. Tolerance of measurements +/-10% System features may change with product improvements due to technical advances.

OPTIONS

RAL colours on inquiry, honeycomb louver on inquiry , Casambi on inquiry, DALI on inquiry, Phase-cut dimming on inquiry.



Generated: 18.05.2024



+48 32 388 80 00

www.cora.pl cora@cora.pl



Street: Ignatza Hakuby 18 41-914 Bytom, Polska