


DOWNLIGHT HEKTOR 2 940 27W 60° GREY PREMIUM WHITE ON/OFF

Article number: N213-K0001-PW940-HA-H60-ZC02_700-S6-###

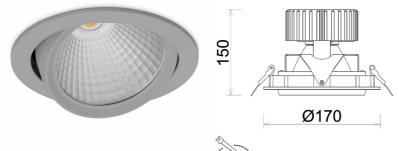

cutout Ø160mm

LED	COB
Light colour	4000 [K] PREMIUM WHITE
CRI	90
Led chip flux Luminous flux	3634 [lm]
System power	2907 [lm]
Luminaire Efficiency	27 [W] 108 [lm/W]
Beam angle	60°
Controller MacAdam	ON/OFF
MacAuam	3 SDCM

Downlight LED

LED downlight for drop ceiling istallation. Aluminium housing. Available in white, black and grey. Any RAL palette colour available on enquiry. Housing enables adjustment in two axis planes. Glass cover included. Reflector beams available: 15°, 30°, 45° and 60°. Maximum power is 37W

LUMINAIRE

Weight	1,1 [kg]
Protection rating IP , IK , class	IP 20, IK 3,
Luminaire colour	GREY
Cover	Glass
Operating voltage	220-240V 50-60Hz

Note: All data are typical values. Tolerance of measurements +/-10% System features may change with product improvements due to technical advances.

OPTIONS

RAL colours on inquiry, honeycomb louver on inquiry , Casambi on inquiry, DALI on inquiry, Phase-cut dimming on inquiry.





+48 32 388 80 00

www.cora.pl cora@cora.pl \bigcirc

Street: Ignatza Hakuby 18 41-914 Bytom, Polska

