


## DOWNLIGHT HEKTOR 2 840 37W 15° GREY | ON/OFF

Article number: N213-K0001-RF840-H8-H15-ZC03\_950-S6-###

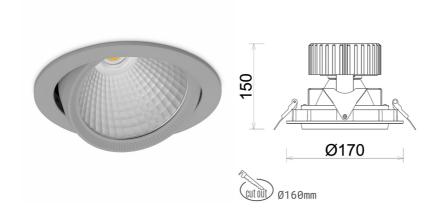

COB Light colour 4000 [K] | CRI 5394 [lm] Led chip flux Luminous flux 4315 [lm] System power 37 [W] Luminaire Efficiency 117 [lm/W] Beam angle 15° Controller ON/OFF MacAdam 3 SDCM

## **Downlight LED**

LED downlight for drop ceiling istallation. Aluminium housing. Available in white, black and grey. Any RAL palette colour available on enquiry. Housing enables adjustment in two axis planes. Glass cover included. Reflector beams available: 15°, 30°, 45° and 60°. Maximum power is 37W

## LUMINAIRE

Weight 1,1 [kg]
Protection rating IP, IK, class IP 20, IK 3,
Luminaire colour GREY

Cover Glass

Operating voltage 220-240V 50-60Hz

Note: All data are typical values. Tolerance of measurements +/-10% System features may change with product improvements due to technical advances.

## **OPTIONS**

RAL colours on inquiry, honeycomb louver on inquiry , Casambi on inquiry, DALI on inquiry, Phase-cut dimming on inquiry.



Generated: 18.05.2024



+48 32 388 80 00



www.cora.pl cora@cora.pl



Street: Ignatza Hakuby 18 41-914 Bytom, Polska