

DOWNLIGHT

DOWNLIGHT HEKTOR 2 840 10W 60° GREY | ON/OFF

COB

80

4000 [K] |

1419 [lm]

1135 [lm]

114 [lm/W]


ON/OFF

3 SDCM

10 [W]

60°

Article number: N213-K0001-RF840-H8-H60-ZC01_250-S6-###

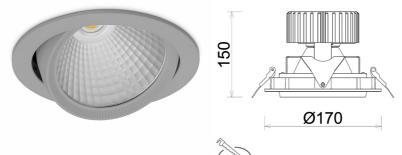

cut out / Ø160mm

Downlight LED		LED
---------------	--	-----

LED downlight for drop ceiling istallation. Aluminium housing. Available in white, black and grey. Any RAL palette colour available on enquiry. Housing enables adjustment in two axis planes. Glass cover included. Reflector beams available: 15°, 30°, 45° and 60°. Maximum power is 37W

11	I IN	IIN	ΔΙ	RF	

Light colour

Led chip flux Luminous flux

System power

Beam angle

Controller

MacAdam

Luminaire Efficiency

CRI

Weight	1,1 [kg]			
Protection rating IP , IK , class	IP 20, IK 3,			
Luminaire colour	GREY			
Cover	Glass			
Operating voltage	220-240V 50-60Hz			

Note: All data are typical values. Tolerance of measurements +/-10% System features may change with product improvements due to technical advances.

OPTIONS

RAL colours on inquiry, honeycomb louver on inquiry , Casambi on inquiry, DALI on inquiry, Phase-cut dimming on inquiry.



+48 3

+48 32 388 80 00

www.cora.pl cora@cora.pl

 \bigcirc

Street: Ignatza Hakuby 18 41-914 Bytom, Polska Generated: 18.05.2024