

DOWNLIGHT

## DOWNLIGHT HEKTOR 2 825 21W 15° GREY BREAD ON/OFF

COB

80

2574 [lm]

2059 [lm]

98 [lm/W]

ON/OFF


3 SDCM

21 [W]

15°

2500 [K] BREAD

Article number: N213-K0001-VF825-H8-H15-ZC02\_550-S6-###

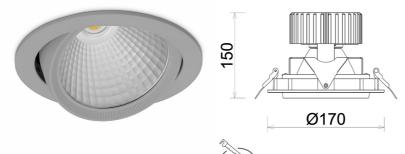

cut out Ø160mm

- C	Down	light	LED

LED downlight for drop ceiling istallation. Aluminium housing. Available in white, black and grey. Any RAL palette colour available on enquiry. Housing enables adjustment in two axis planes. Glass cover included. Reflector beams available: 15°, 30°, 45° and 60°. Maximum power is 37W

Light colour CRI

Led chip flux Luminous flux

System power

Beam angle

Controller

MacAdam

Luminaire Efficiency

UMINAIRE			
Weight	1,1 [kg]		
Protection rating IP , IK , class	IP 20, IK 3,		
Luminaire colour	GREY		
Cover	Glass		
Operating voltage	220-240V 50-60Hz		

## .

## OPTIONS

RAL colours on inquiry, honeycomb louver on inquiry , Casambi on inquiry, DALI on inquiry, Phase-cut dimming on inquiry.



+48 32

+48 32 388 80 00

www.cora.pl cora@cora.pl

 $\bigcirc$ 

Street: Ignatza Hakuby 18 41-914 Bytom, Polska

Note: All data are typical values. Tolerance of measurements +/-10% System features

may change with product improvements due to technical advances.

Generated: 19.05.2024