


## DOWNLIGHT HEKTOR 2 825 21W 45° GREY BREAD ON/OFF

Article number: N213-K0001-VF825-H8-H45-ZC02\_550-S6-###

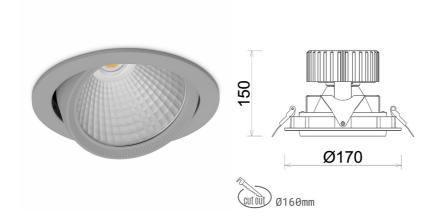

LED COB
Light colour 2500 [K] BREAD

CRI 80

 Led chip flux
 2574 [lm]

 Luminous flux
 2059 [lm]

 System power
 21 [W]

System power 21 [W]
Luminaire Efficiency 98 [Im/W]

Beam angle 45°

Controller ON/OFF

MacAdam 3 SDCM

## LUMINAIRE

Weight 1,1 [kg]

Protection rating IP, IK, class IP 20, IK 3,

Luminaire colour Glass

Operating voltage 220-240V 50-60Hz

## **Downlight LED**

LED downlight for drop ceiling istallation. Aluminium housing. Available in white, black and grey. Any RAL palette colour available on enquiry. Housing enables adjustment in two axis planes. Glass cover included. Reflector beams available: 15°, 30°, 45° and 60°. Maximum power is 37W

Note: All data are typical values. Tolerance of measurements  $\pm 1.0\%$  System features may change with product improvements due to technical advances.

## **OPTIONS**

RAL colours on inquiry, honeycomb louver on inquiry , Casambi on inquiry, DALI on inquiry, Phase-cut dimming on inquiry.



Generated: 18.05.2024



+48 32 388 80 00



www.cora.pl cora@cora.pl



Street: Ignatza Hakuby 18 41-914 Bytom, Polska