


DOWNLIGHT

DOWNLIGHT HEKTOR 2 930 27W 30° BLACK PREMIUM WHITE ON/OFF

Article number: N213-K0002-HE930-HA-H30-ZC02_700-S6-###

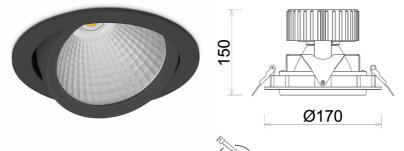

Ø160mm

LED	COB
Light colour	3000 [K] PREMIUM WHITE
CRI	90
Led chip flux	3911 [lm]
Luminous flux System power	3128 [lm]
Luminaire Efficiency	27 [W]
Beam angle	116 [lm/W]
Controller	30° ON/OFF
MacAdam	3 SDCM
	0.0001

Downlight LED

LED downlight for drop ceiling istallation. Aluminium housing. Available in white, black and grey. Any RAL palette colour available on enquiry. Housing enables adjustment in two axis planes. Glass cover included. Reflector beams available: 15°, 30°, 45° and 60°. Maximum power is 37W

LUMINAIRE

Weight	1,1 [kg]
Protection rating IP , IK , class	IP 20, IK 3,
Luminaire colour	BLACK
Cover	Glass
Operating voltage	220-240V 50-60Hz

Note: All data are typical values. Tolerance of measurements +/-10% System features may change with product improvements due to technical advances.

OPTIONS

RAL colours on inquiry, honeycomb louver on inquiry , Casambi on inquiry, DALI on inquiry, Phase-cut dimming on inquiry.





+48 32 388 80 00

www.cora.pl cora@cora.pl

Street: Ignatza Hakuby 18 41-914 Bytom, Polska

