


DOWNLIGHT

DOWNLIGHT HEKTOR 2 935 35W 15° BLACK PREMIUM WHITE ON/OFF

Article number: N213-K0002-HE935-HA-H15-ZC03_900-S6-###

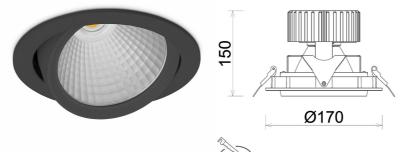

cutout Ø160mm

- J

LED downlight for drop ceiling istallation. Aluminium housing. Available in white, black and grey. Any RAL palette colour available on enquiry. Housing enables adjustment in two axis planes. Glass cover included. Reflector beams available: 15°, 30°, 45° and 60°. Maximum power is 37W

LED	СОВ
Light colour	3500 [K] PREMIUM WHITE
CRI	90
Led chip flux	50
Luminous flux	4038 [lm]
Luminous nux	3230 [lm]
System power	05 04/1
Luminaire Efficiency	35 [W]
	92 [lm/W]
Beam angle	15°
Controller	
MacAdam	ON/OFF
indo louin	3 SDCM

LUMINAIRE

Weight	1,1 [kg]
Protection rating IP , IK , class	IP 20, IK 3,
Luminaire colour	BLACK
Cover	Glass
Operating voltage	220-240V 50-60Hz

Note: All data are typical values. Tolerance of measurements +/-10% System features may change with product improvements due to technical advances.

OPTIONS

RAL colours on inquiry, honeycomb louver on inquiry , Casambi on inquiry, DALI on inquiry, Phase-cut dimming on inquiry.





+48 32 388 80 00

www.cora.pl cora@cora.pl \bigcirc

Street: Ignatza Hakuby 18 41-914 Bytom, Polska Generated: 18.05.2024