


## DOWNLIGHT HEKTOR 2 930 23W 45° BLACK CRI97 ON/OFF

Article number: N213-K0002-HI930-H8-H45-ZC02\_600-S6-###

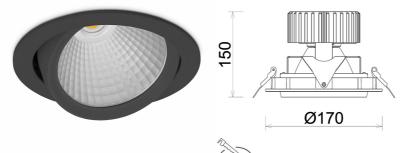

cutout Ø160mm

СОВ	D
3000 [K] CRI97	LE wł er be
90	
2601 [lm]	
2080 [lm]	

23 [W]

45°

90 [lm/W]

ON/OFF

3 SDCM

### Downlight LED

ED downlight for drop ceiling istallation. Aluminium housing. Available in *r*hite, black and grey. Any RAL palette colour available on enquiry. Housing nables adjustment in two axis planes. Glass cover included. Reflector eams available: 15°, 30°, 45° and 60°. Maximum power is 37W

## LUMINAIRE

Light colour

Led chip flux Luminous flux

System power

Beam angle

Controller

MacAdam

Luminaire Efficiency

CRI

Weight	1,1 [kg]		
Protection rating IP , IK , class	IP 20, IK 3,		
Luminaire colour	BLACK		
Cover	Glass		
Operating voltage	220-240V 50-60Hz		

# Note: All data are typical values. Tolerance of measurements +/-10% System features may change with product improvements due to technical advances.

#### OPTIONS

RAL colours on inquiry, honeycomb louver on inquiry , Casambi on inquiry, DALI on inquiry, Phase-cut dimming on inquiry.



+48 32

+48 32 388 80 00

www.cora.pl cora@cora.pl



Street: Ignatza Hakuby 18 41-914 Bytom, Polska Generated: 18.05.2024