


## DOWNLIGHT

# DOWNLIGHT HEKTOR 2 930 37W 15° BLACK PREMIUM COLOR ON/OFF

Article number: N213-K0002-PC930-HA-H15-ZC03\_950-S6-###

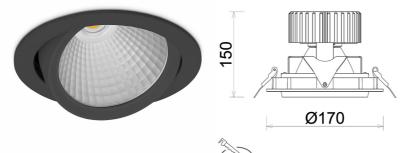

Ø160mm

LED	COB
Light colour	3000 [K] PREMIUM COLOR
CRI Led chip flux	90
Luminous flux	3827 [lm]
System power	3061 [lm]
Luminaire Efficiency	37 [W] 83 [lm/W]
Beam angle	15°
Controller MacAdam	ON/OFF
	3 SDCM

### Downlight LED

LED downlight for drop ceiling istallation. Aluminium housing. Available in white, black and grey. Any RAL palette colour available on enquiry. Housing enables adjustment in two axis planes. Glass cover included. Reflector beams available: 15°, 30°, 45° and 60°. Maximum power is 37W

#### LUMINAIRE

L

Weight	1,1 [kg]
Protection rating IP , IK , class	IP 20, IK 3,
Luminaire colour	BLACK
Cover	Glass
Operating voltage	220-240V 50-60Hz

Note: All data are typical values. Tolerance of measurements +/-10% System features may change with product improvements due to technical advances.

### **OPTIONS**

RAL colours on inquiry, honeycomb louver on inquiry , Casambi on inquiry, DALI on inquiry, Phase-cut dimming on inquiry.





+48 32 388 80 00

www.cora.pl cora@cora.pl

Street: Ignatza Hakuby 18 41-914 Bytom, Polska

