


DOWNLIGHT HEKTOR 2 940 21W 15° BLACK PREMIUM WHITE ON/OFF

Article number: N213-K0002-PW940-HA-H15-ZC02_550-S6-###

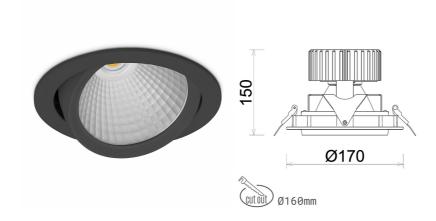

LED COB

Light colour 4000 [K] PREMIUM WHITE

CRI

90

 Led chip flux
 2912 [lm]

 Luminous flux
 2329 [lm]

 System power
 21 [W]

 Luminaire Efficiency
 111 [lm/W]

 Beam angle
 111 [lm/W]

Controller

MacAdam

15°

ON/OFF

3 SDCM

LUMINAIRE

 Weight
 1,1 [kg]

 Protection rating IP , IK , class
 IP 20, IK 3,

 Luminaire colour
 BLACK

 Cover
 Glass

 Operating voltage
 220-240V 50-60Hz

Downlight LED

LED downlight for drop ceiling istallation. Aluminium housing. Available in white, black and grey. Any RAL palette colour available on enquiry. Housing enables adjustment in two axis planes. Glass cover included. Reflector beams available: 15°, 30°, 45° and 60°. Maximum power is 37W

Note: All data are typical values. Tolerance of measurements +/-10% System features may change with product improvements due to technical advances.

OPTIONS

RAL colours on inquiry, honeycomb louver on inquiry , Casambi on inquiry, DALI on inquiry, Phase-cut dimming on inquiry.



Generated: 18.05.2024



+48 32 388 80 00



www.cora.pl cora@cora.pl



Street: Ignatza Hakuby 18 41-914 Bytom, Polska