


DOWNLIGHT

DOWNLIGHT HEKTOR 2 940 23W 30° BLACK PREMIUM WHITE ON/OFF

Article number: N213-K0002-PW940-HA-H30-ZC02_600-S6-###

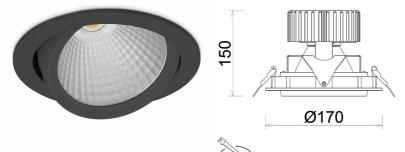

cutout) Ø160mm

Light colour4000 [K] PREMIUM WHITECRI90Led chip flux3157 [Im]Luminous flux2525 [Im]System power23 [W]Luminaire Efficiency110 [Im/W]	LED	COB
90 Led chip flux 3157 [Im] Luminous flux System power Luminaire Efficiency 110 [Im/W]	Light colour	
Led chip flux 3157 [lm] Luminous flux 2525 [lm] System power 23 [W] Luminaire Efficiency 110 [lm/W]	CRI	90
Luminous flux 2525 [lm] System power 23 [W] Luminaire Efficiency 110 [lm/W]	Led chip flux	
System power 23 [W] Luminaire Efficiency 110 [Im/W]	Luminous flux	
Luminaire Efficiency 110 [lm/W]	System power	L 4
	Luminaire Efficiency	L 4
Beam angle 30°	Beam angle	
Controller ON/OFF	Controller	
MacAdam 3 SDCM	MacAdam	
2.2 PC(A)		5 500W

Downlight LED

LED downlight for drop ceiling istallation. Aluminium housing. Available in white, black and grey. Any RAL palette colour available on enquiry. Housing enables adjustment in two axis planes. Glass cover included. Reflector beams available: 15°, 30°, 45° and 60°. Maximum power is 37W

LUMINAIRE

Weight	1,1 [kg]
Protection rating IP , IK , class	IP 20, IK 3,
Luminaire colour	BLACK
Cover	Glass
Operating voltage	220-240V 50-60Hz

Note: All data are typical values. Tolerance of measurements +/-10% System features may change with product improvements due to technical advances.

OPTIONS

RAL colours on inquiry, honeycomb louver on inquiry , Casambi on inquiry, DALI on inquiry, Phase-cut dimming on inquiry.





+48 32 388 80 00

www.cora.pl cora@cora.pl \bigcirc

Street: Ignatza Hakuby 18 41-914 Bytom, Polska

