


DOWNLIGHT HEKTOR 2 940 11W 45° BLACK PREMIUM WHITE ON/OFF

COB

Article number: N213-K0002-PW940-HA-H45-ZC01_250-S6-###

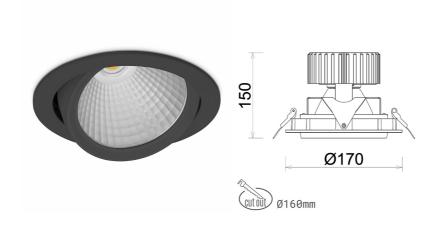

 Light colour
 4000 [K] PREMIUM WHITE

 CRI
 90

 Led chip flux
 1343 [lm]

 Luminous flux
 1074 [lm]

 System power
 11 [W]

 Luminaire Efficiency
 98 [lm/W]

 Beam angle
 45°

 Controller
 ON/OFF

 MacAdam
 3 SDCM

LUMINAIRE

 Weight
 1,1 [kg]

 Protection rating IP , IK , class
 IP 20, IK 3,

 Luminaire colour
 BLACK

 Cover
 Glass

 Operating voltage
 220-240V 50-60Hz

Downlight LED

LED downlight for drop ceiling istallation. Aluminium housing. Available in white, black and grey. Any RAL palette colour available on enquiry. Housing enables adjustment in two axis planes. Glass cover included. Reflector beams available: 15°, 30°, 45° and 60°. Maximum power is 37W

Note: All data are typical values. Tolerance of measurements +/-10% System features may change with product improvements due to technical advances.

OPTIONS

RAL colours on inquiry, honeycomb louver on inquiry , Casambi on inquiry, DALI on inquiry, Phase-cut dimming on inquiry.



Generated: 18.05.2024



+48 32 388 80 00



www.cora.pl cora@cora.pl



Street: Ignatza Hakuby 18 41-914 Bytom, Polska