


## DOWNLIGHT HEKTOR 2 940 21W 60° BLACK PREMIUM WHITE ON/OFF

Article number: N213-K0002-PW940-HA-H60-ZC02\_550-S6-###

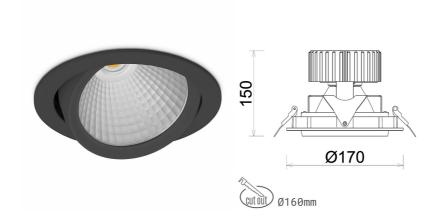

LED COB

Light colour 4000 [K] PREMIUM WHITE

CRI

90 Led chip flux

2912 [lm]

Luminous flux

System power

Luminaire Efficiency

Beam angle

2912 [lm]

2329 [lm]

21 [W]

111 [lm/W]

Controller

MacAdam

60°

ON/OFF

3 SDCM

## LUMINAIRE

 Weight
 1,1 [kg]

 Protection rating IP , IK , class
 IP 20, IK 3,

 Luminaire colour
 BLACK

 Cover
 Glass

 Operating voltage
 220-240V 50-60Hz

## **Downlight LED**

LED downlight for drop ceiling istallation. Aluminium housing. Available in white, black and grey. Any RAL palette colour available on enquiry. Housing enables adjustment in two axis planes. Glass cover included. Reflector beams available: 15°, 30°, 45° and 60°. Maximum power is 37W

Note: All data are typical values. Tolerance of measurements  $\pm -10\%$  System features may change with product improvements due to technical advances.

## **OPTIONS**

RAL colours on inquiry, honeycomb louver on inquiry , Casambi on inquiry, DALI on inquiry, Phase-cut dimming on inquiry.



Generated: 18.05.2024



+48 32 388 80 00



www.cora.pl cora@cora.pl



Street: Ignatza Hakuby 18 41-914 Bytom, Polska