

DOWNLIGHT

## DOWNLIGHT HEKTOR 2 830 37W 45° BLACK | ON/OFF

COB

80

3000 [K] |

5172 [lm]

4137 [lm]

112 [lm/W]


ON/OFF

3 SDCM

37 [W]

45°

Article number: N213-K0002-RF830-H8-H45-ZC03\_950-S6-###

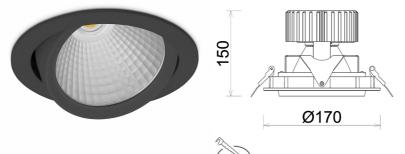

cutout Ø160mm

Down	ligh	t LEC

LED downlight for drop ceiling istallation. Aluminium housing. Available in white, black and grey. Any RAL palette colour available on enquiry. Housing enables adjustment in two axis planes. Glass cover included. Reflector beams available: 15°, 30°, 45° and 60°. Maximum power is 37W

LU	M	NA	IRE

Light colour

Led chip flux Luminous flux

System power

Beam angle

Controller

MacAdam

Luminaire Efficiency

CRI

Weight	1,1 [kg]
Protection rating IP , IK , class	IP 20, IK 3,
Luminaire colour	BLACK
Cover	Glass
Operating voltage	220-240V 50-60Hz

may	change	with	product	improv	ements	due to	technica	al advar	nces.

## **OPTIONS**

RAL colours on inquiry, honeycomb louver on inquiry , Casambi on inquiry, DALI on inquiry, Phase-cut dimming on inquiry.



+48 32

+48 32 388 80 00

www.cora.pl cora@cora.pl



Street: Ignatza Hakuby 18 41-914 Bytom, Polska

Note: All data are typical values. Tolerance of measurements +/-10% System features

Generated: 19.05.2024