

DOWNLIGHT

## DOWNLIGHT HEKTOR 2 835 37W 30° BLACK | ON/OFF

СОВ

80

3500 [K] |

5288 [lm]

4230 [lm]

114 [lm/W]


ON/OFF

3 SDCM

37 [W]

30°

Article number: N213-K0002-RF835-H8-H30-ZC03\_950-S6-###

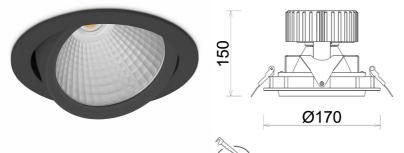

cut out Ø160mm

D	own	ligl	ht	LE	

LED downlight for drop ceiling istallation. Aluminium housing. Available in white, black and grey. Any RAL palette colour available on enquiry. Housing enables adjustment in two axis planes. Glass cover included. Reflector beams available: 15°, 30°, 45° and 60°. Maximum power is 37W

11	111	ЛIN	R	F

Light colour

Led chip flux Luminous flux

System power

Beam angle

Controller

MacAdam

Luminaire Efficiency

CRI

Weight	1,1 [kg]
Protection rating IP , IK , class	IP 20, IK 3,
Luminaire colour	BLACK
Cover	Glass
Operating voltage	220-240V 50-60Hz

Note: All data are typical values. Tolerance of measurements +/-10% System features may change with product improvements due to technical advances.

## OPTIONS

RAL colours on inquiry, honeycomb louver on inquiry , Casambi on inquiry, DALI on inquiry, Phase-cut dimming on inquiry.



+48 32

+48 32 388 80 00

www.cora.pl cora@cora.pl

 $\bigcirc$ 

Street: Ignatza Hakuby 18 41-914 Bytom, Polska Generated: 18.05.2024