


DOWNLIGHT

# DOWNLIGHT HEKTOR 2 840 35W 30° BLACK | ON/OFF

COB

Article number: N213-K0002-RF840-H8-H30-ZC03\_900-S6-###

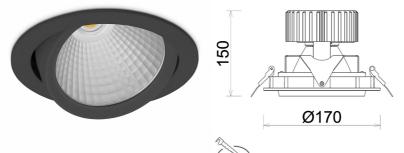

cutout Ø160mm

Light colour	4000 [K]
CRI	80
Led chip flux	5110 [lm]
Luminous flux	4088 [lm]
System power	35 [W]
Luminaire Efficiency	117 [lm/W]
Beam angle	30°
Controller	ON/OFF
MacAdam	3 SDCM

### Downlight LED

LED downlight for drop ceiling istallation. Aluminium housing. Available in white, black and grey. Any RAL palette colour available on enquiry. Housing enables adjustment in two axis planes. Glass cover included. Reflector beams available: 15°, 30°, 45° and 60°. Maximum power is 37W

## LUMINAIRE

Weight	1,1 [kg]
Protection rating IP , IK , class	IP 20, IK 3,
Luminaire colour	BLACK
Cover	Glass
Operating voltage	220-240V 50-60Hz

# Note: All data are typical values. Tolerance of measurements +/-10% System features may change with product improvements due to technical advances.

#### OPTIONS

RAL colours on inquiry, honeycomb louver on inquiry , Casambi on inquiry, DALI on inquiry, Phase-cut dimming on inquiry.





+48 32 388 80 00

www.cora.pl cora@cora.pl



Street: Ignatza Hakuby 18 41-914 Bytom, Polska Generated: 18.05.2024