


## DOWNLIGHT HEKTOR 2 930 21W 30° BLACK | ON/OFF

Article number: N213-K0002-RF930-H8-H30-ZC02\_550-S6-###

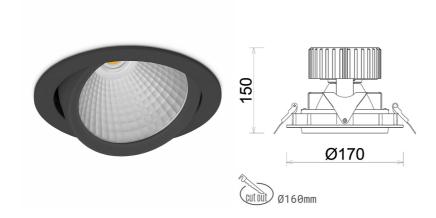

COB Light colour 3000 [K] | CRI Led chip flux 2536 [lm] Luminous flux 2028 [lm] System power 21 [W] Luminaire Efficiency 97 [lm/W] Beam angle 30° Controller ON/OFF MacAdam 3 SDCM

## **Downlight LED**

LED downlight for drop ceiling istallation. Aluminium housing. Available in white, black and grey. Any RAL palette colour available on enquiry. Housing enables adjustment in two axis planes. Glass cover included. Reflector beams available: 15°, 30°, 45° and 60°. Maximum power is 37W

## LUMINAIRE

Weight 1,1 [kg]
Protection rating IP , IK , class IP 20, IK 3,
Luminaire colour BLACK
Cover Glass
Operating voltage 220-240V 50-60Hz

Note: All data are typical values. Tolerance of measurements +/-10% System features may change with product improvements due to technical advances.

## **OPTIONS**

RAL colours on inquiry, honeycomb louver on inquiry , Casambi on inquiry, DALI on inquiry, Phase-cut dimming on inquiry.



Generated: 18.05.2024



+48 32 388 80 00



www.cora.pl cora@cora.pl



Street: Ignatza Hakuby 18 41-914 Bytom, Polska