


DOWNLIGHT

DOWNLIGHT HEKTOR 2 940 37W 30° BLACK | ON/OFF

Article number: N213-K0002-RF940-H8-H30-ZC03_950-S6-###

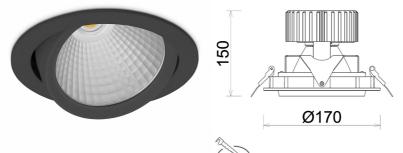

cutout Ø160mm

COB	Do
4000 [K]	LEI
90	whi ena
4591 [lm]	bea

3672 [lm]

99 [lm/W]

ON/OFF

3 SDCM

37 [W]

30°

Downlight LED

ED downlight for drop ceiling istallation. Aluminium housing. Available in white, black and grey. Any RAL palette colour available on enquiry. Housing enables adjustment in two axis planes. Glass cover included. Reflector beams available: 15°, 30°, 45° and 60°. Maximum power is 37W

LUMINAIRE

Light colour

Led chip flux Luminous flux

System power

Beam angle

Controller

MacAdam

Luminaire Efficiency

CRI

Weight	1,1 [kg]
Protection rating IP , IK , class	IP 20, IK 3,
Luminaire colour	BLACK
Cover	Glass
Operating voltage	220-240V 50-60Hz

Note: All data are typical values. Tolerance of measurements +/-10% System features may change with product improvements due to technical advances.

OPTIONS

RAL colours on inquiry, honeycomb louver on inquiry , Casambi on inquiry, DALI on inquiry, Phase-cut dimming on inquiry.



+48 3

+48 32 388 80 00

www.cora.pl cora@cora.pl



Street: Ignatza Hakuby 18 41-914 Bytom, Polska Generated: 26.06.2024