


DOWNLIGHT HEKTOR 2 825 14W 15° BLACK BREAD ON/OFF

Article number: N213-K0002-VF825-H8-H15-ZC01_350-S6-###

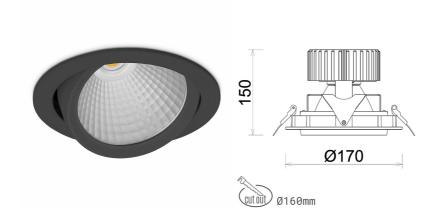

LED COB

Light colour 2500 [K] BREAD

CRI 8

 Led chip flux
 1674 [lm]

 Luminous flux
 1339 [lm]

 System power
 14 [W]

Luminaire Efficiency 96 [lm/W]

Beam angle 15°
Controller ON/OFF
MacAdam 3 SDCM

LUMINAIRE

Weight 1,1 [kg]

Protection rating IP , IK , class IP 20, IK 3,

Luminaire colour BLACK

Cover Glass

Operating voltage 220-240V 50-60Hz

Downlight LED

LED downlight for drop ceiling istallation. Aluminium housing. Available in white, black and grey. Any RAL palette colour available on enquiry. Housing enables adjustment in two axis planes. Glass cover included. Reflector beams available: 15°, 30°, 45° and 60°. Maximum power is 37W

Note: All data are typical values. Tolerance of measurements $\pm 1.0\%$ System features may change with product improvements due to technical advances.

OPTIONS

RAL colours on inquiry, honeycomb louver on inquiry , Casambi on inquiry, DALI on inquiry, Phase-cut dimming on inquiry.



Generated: 23.05.2024



+48 32 388 80 00



www.cora.pl cora@cora.pl



Street: Ignatza Hakuby 18 41-914 Bytom, Polska