


DOWNLIGHT

DOWNLIGHT CYGNUS Z1 835 14W 60° GREY | ON/OFF

Article number: N214-K0001-RF835-H8-H60-ZC01_350-S6-###



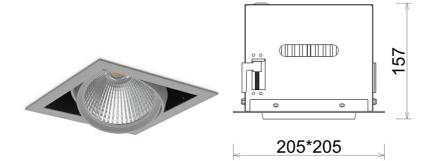

Downlight LED
LED downlight fo

Light colour3500 [K] CRI80Led chip flux1948 [Im]Luminous flux1558 [Im]System power14 [W]Luminaire Efficiency111 [Im/W]Beam angle60°ControllerON/OFF	COB
Led chip flux1948 [lm]Luminous flux1558 [lm]System power14 [W]Luminaire Efficiency111 [lm/W]Beam angle60°	3500 [K]
Luminous flux1558 [lm]System power14 [W]Luminaire Efficiency111 [lm/W]Beam angle60°	80
System power14 [W]Luminaire Efficiency111 [Im/W]Beam angle60°	1948 [lm]
Luminaire Efficiency111 [Im/W]Beam angle60°	1558 [lm]
Beam angle 60°	14 [W]
	111 [lm/W]
Controller ON/OFF	60°
	ON/OFF
MacAdam 3 SDCM	3 SDCM
MacAdam LUMINAIRE	

LED downlight for drop ceiling installation. Aluminium housing. Available in white and black. Any RAL palette colour available on enquiry. Housing enables adjustment in two axis planes. Glass cover included. Reflector beams available: 15°, 30°, 45° and 60°. Maximum power is 37W

Note: All data are typical values. Tolerance of measurements +/-10% System features may change with product improvements due to technical advances.

OPTIONS

Cover

Weight

Luminaire colour

Operating voltage

RAL colours on inquiry, honeycomb louver on inquiry , Casambi on inquiry, DALI on inquiry, Phase-cut dimming on inquiry.

2,05 [kg]

GREY

Glass

IP 20, IK 3,

220-240V 50-60Hz



Protection rating IP , IK , class

+48 32

+48 32 388 80 00

www.cora.pl cora@cora.pl

 \bigcirc

Street: Ignatza Hakuby 18 41-914 Bytom, Polska Generated: 02.06.2024