

DOWNLIGHT

DOWNLIGHT CYGNUS Z1 840 35W 15° GREY | ON/OFF

COB

80

4000 [K] |

5110 [lm]

4088 [lm]

117 [lm/W]


ON/OFF

3 SDCM

35 [W]

15°

Article number: N214-K0001-RF840-H8-H15-ZC03_900-S6-###

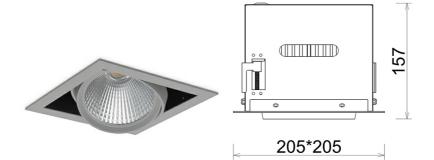



Down	liql	ht l	LED

LED downlight for drop ceiling installation. Aluminium housing. Available in white and black. Any RAL palette colour available on enquiry. Housing enables adjustment in two axis planes. Glass cover included. Reflector beams available: 15°, 30°, 45° and 60°. Maximum power is 37W

LU	JM	IN A	٨IR	Ε

Light colour

Led chip flux

Luminous flux

System power

Beam angle

Controller

MacAdam

Luminaire Efficiency

CRI

JMINAIRE				
Weight	2,05 [kg]			
Protection rating IP , IK , class	IP 20, IK 3,			
Luminaire colour	GREY			
Cover	Glass			
Operating voltage	220-240V 50-60Hz			

Note: All data are typical values. Tolerance of measurements +/-10% System features may change with product improvements due to technical advances.

OPTIONS

RAL colours on inquiry, honeycomb louver on inquiry , Casambi on inquiry, DALI on inquiry, Phase-cut dimming on inquiry.



+48 32

+48 32 388 80 00

www.cora.pl cora@cora.pl

 \bigcirc

Street: Ignatza Hakuby 18 41-914 Bytom, Polska Generated: 26.06.2024