

DOWNLIGHT CYGNUS Z1 835 35W 45° BLACK | ON/OFF

COB

80

3500 [K] |

5010 [lm]

4008 [lm]

115 [lm/W]


ON/OFF

3 SDCM

35 [W]

45°

Article number: N214-K0002-RF835-H8-H45-ZC03_900-S6-###

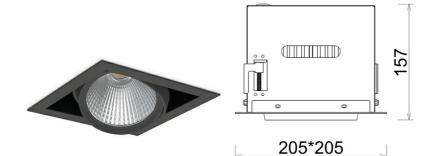



Downlight LED
LED downlight for

MacAdam

Light colour

Led chip flux

Luminous flux

System power

Beam angle

Controller

Luminaire Efficiency

CRI

LUMINAIRE	
Weight	2,05 [kg]
Protection rating IP , IK , class	IP 20, IK 3,
Luminaire colour	BLACK
Cover	Glass
Operating voltage	220-240V 50-60Hz

ght for drop ceiling installation. Aluminium housing. Available in white and black. Any RAL palette colour available on enquiry. Housing enables adjustment in two axis planes. Glass cover included. Reflector beams available: 15°, 30°, 45° and 60°. Maximum power is 37W

Note: All data are typical values. Tolerance of measurements +/-10% System features may change with product improvements due to technical advances.

OPTIONS

RAL colours on inquiry, honeycomb louver on inquiry , Casambi on inquiry, DALI on inquiry, Phase-cut dimming on inquiry.



+48 32 388 80 00

www.cora.pl cora@cora.pl

Street: Ignatza Hakuby 18 41-914 Bytom, Polska