

DOWNLIGHT CYGNUS Z1 957 23W 45° WHITE SPECIAL ON/OFF

СОВ

90 3023 [lm]

2418 [lm]

23 [W] 105 [lm/W]


45°

ON/OFF

3 SDCM

5700 [K] SPECIAL

Article number: N214-K0003-CC957-H8-H45-ZC02_600-S6-###

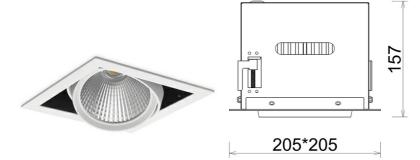



Downl	ia	ht	I FD
201111	•9		

LED downlight for drop ceiling installation. Aluminium housing. Available in white and black. Any RAL palette colour available on enquiry. Housing enables adjustment in two axis planes. Glass cover included. Reflector beams available: 15°, 30°, 45° and 60°. Maximum power is 37W

LU	M	N.	AI	R	E

Controller

MacAdam

Light colour

Led chip flux Luminous flux

System power

Luminaire Efficiency Beam angle

CRI

2,05 [kg]				
IP 20, IK 3,				
WHITE				
Glass				
220-240V 50-60Hz				

Note: All data are typical values. Tolerance of measurements +/-10% System features may change with product improvements due to technical advances.

OPTIONS

RAL colours on inquiry, honeycomb louver on inquiry , Casambi on inquiry, DALI on inquiry, Phase-cut dimming on inquiry.



+48 3

+48 32 388 80 00

www.cora.pl cora@cora.pl

 \bigcirc

Street: Ignatza Hakuby 18 41-914 Bytom, Polska Generated: 26.06.2024