


LINEAR LED LINE H 840 21W 856mm LOW UGR WHITE | ON/OFF | THROUGH WIRING

Article number: H084-K0003-3F840-##-H3L-ZLN6_350-##-3PO

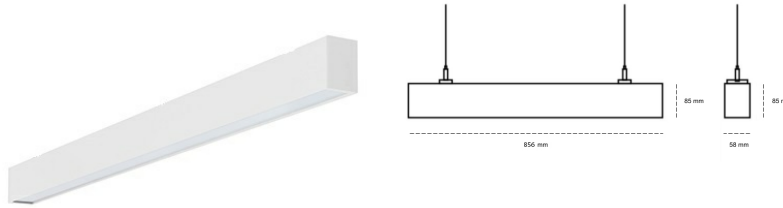

| | |
|----------------------|-------------------|
| LED | SMD |
| Light colour | 4000 [K] STANDARD |
| CRI | 80 |
| Led chip flux | 2280 [lm] |
| Luminous flux | 1048 [lm] |
| System power | 21 [W] |
| Luminaire Efficiency | 50 [lm/W] |
| Beam angle | LOW UGR |
| Controller | ON/OFF |
| MacAdam | 3 SDCM |

Linear LED

Linear LED luminaire with through wiring connecting system . Available in white, black and grey. Any RAL palette colour available on enquiry. Aluminium housing. Suspended or surface installation possible. Diffusers: nano opal, micro-prismatic, low UGR

LUMINAIRE

| | |
|-----------------------------------|------------------|
| Weight | 3,9 [kg] |
| Protection rating IP , IK , class | IP 20, IK 1, |
| Luminaire colour | WHITE |
| Cover | Plastic |
| Operating voltage | 220-240V 50-60Hz |

Note: All data are typical values. Tolerance of measurements +/-10% System features may change with product improvements due to technical advances.

OPTIONS

RAL colours on inquiry, wood pattern on inquiry, Tunable white on inquiry, Casambi on inquiry, DALI on inquiry,



Generated: 16.07.2024



+48 32 388 80 00



www.cora.pl
cora@cora.pl



Street: Ignatza Hakuby 18
41-914 Bytom, Polska