


LINEAR LED LINE H 930 44W 1976mm MICROPRYZMA BLACK | ON/OFF | THROUGH WIRING

Article number: H196-K0002-7F930-##-H7M-ZLN8_350-###-3PO

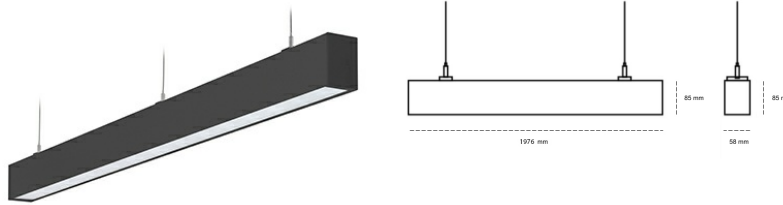

LED	SMD
Light colour	3000 [K] STANDARD
CRI	90
Led chip flux	5580 [lm]
Luminous flux	3348 [lm]
System power	44 [W]
Luminaire Efficiency	76 [lm/W]
Beam angle	MICROPRYZMA
Controller	ON/OFF
MacAdam	3 SDCM

Linear LED

Linear LED luminaire with through wiring connecting system . Available in white, black and grey. Any RAL palette colour available on enquiry. Aluminium housing. Suspended or surface installation possible. Diffusers: nano opal, micro-prismatic, low UGR

LUMINAIRE

Weight	3,9 [kg]
Protection rating IP , IK , class	IP 20, IK 1,
Luminaire colour	BLACK
Cover	Plastic
Operating voltage	220-240V 50-60Hz

Note: All data are typical values. Tolerance of measurements +/-10% System features may change with product improvements due to technical advances.

OPTIONS

RAL colours on inquiry, wood pattern on inquiry, Tunable white on inquiry, Casambi on inquiry, DALI on inquiry,



Generated: 16.07.2024



+48 32 388 80 00



www.cora.pl
cora@cora.pl



Street: Ignatza Hakuby 18
41-914 Bytom, Polska