


# LINEAR LED LINE H 830 50W 2256mm MICROPRYZMA WHITE | ON/OFF | THROUGH WIRING

Article number: H224-K0003-8F830-##-H8M-ZLN8\_350-###-3PO

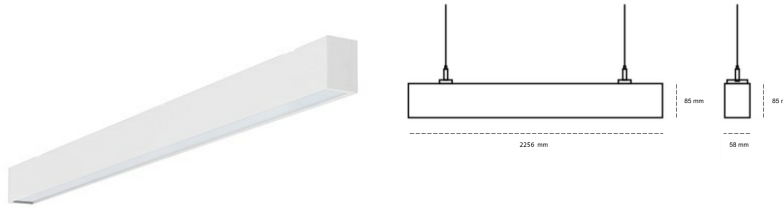

LED	SMD
Light colour	3000 [K] STANDARD
CRI	80
Led chip flux	7644 [lm]
Luminous flux	4509 [lm]
System power	50 [W]
Luminaire Efficiency	90 [lm/W]
Beam angle	MICROPRYZMA
Controller	ON/OFF
MacAdam	3 SDCM

### Linear LED

Linear LED luminaire with through wiring connecting system . Available in white, black and grey. Any RAL palette colour available on enquiry. Aluminium housing. Suspended or surface installation possible. Diffusers: nano opal, micro-prismatic, low UGR

### LUMINAIRE

Weight	3,9 [kg]
Protection rating IP , IK , class	IP 20, IK 1,
Luminaire colour	WHITE
Cover	Plastic
Operating voltage	220-240V 50-60Hz

Note: All data are typical values. Tolerance of measurements +/-10% System features may change with product improvements due to technical advances.

### OPTIONS

RAL colours on inquiry, wood pattern on inquiry, Tunable white on inquiry, Casambi on inquiry, DALI on inquiry,



Generated: 16.07.2024



+48 32 388 80 00



www.cora.pl  
cora@cora.pl



Street: Ignatza Hakuby 18  
41-914 Bytom, Polska