


# LINEAR LED LINE M 940 46W 1416mm MICROPRYZMA BLACK | ON/OFF |

Article number: M140-K0002-5F940-##-C5M-ZLN6\_500-###-###

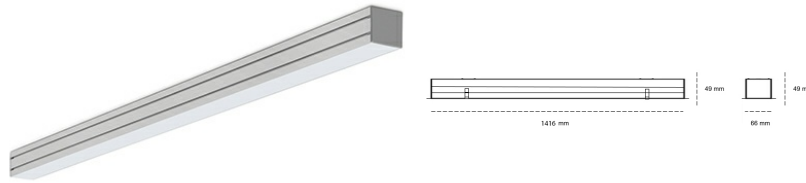

LED	SMD
Light colour	4000 [K] STANDARD
CRI	90
Led chip flux	6900 [lm]
Luminous flux	4140 [lm]
System power	46 [W]
Luminaire Efficiency	90 [lm/W]
Beam angle	MICROPRYZMA
Controller	ON/OFF
MacAdam	3 SDCM

## Linear LED

Linear LED luminaire. Available in white, black and grey. Any RAL palette colour available on enquiry. Aluminium housing. Suspended or surface installation possible. Diffusers: nano opal, micro-prismatic, low UGR

## LUMINAIRE

Weight	3,9 [kg]
Protection rating IP , IK , class	IP 20, IK 1,
Luminaire colour	WHITE
Cover	Plastic
Operating voltage	220-240V 50-60Hz

Note: All data are typical values. Tolerance of measurements +/-10% System features may change with product improvements due to technical advances.

## OPTIONS

RAL colours on inquiry, wood pattern on inquiry, Tunable white on inquiry, Casambi on inquiry, DALI on inquiry,



Generated: 17.09.2024



+48 32 388 80 00



www.cora.pl  
cora@cora.pl



Street: Ignatza Hakuby 18  
41-914 Bytom, Polska