


DOWNLIGHT HEKTOR 2 942 35W 30° GREY MEAT WHITE ON/OFF

COB

ON/OFF

3 SDCM

Article number: N213-K0001-CC942-H8-H30-ZC03_900-S6-###

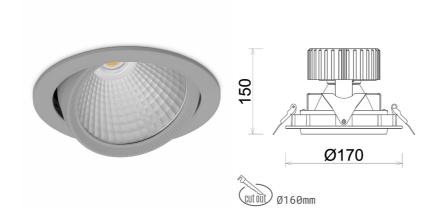

 Light colour
 4200 [K] MEAT WHITE

 CRI
 90

 Led chip flux
 3375 [lm]

 Luminous flux
 2700 [lm]

 System power
 35 [W]

 Luminaire Efficiency
 77 [lm/W]

 Beam angle
 30°

Downlight LED

LED downlight for drop ceiling istallation. Aluminium housing. Available in white, black and grey. Any RAL palette colour available on enquiry. Housing enables adjustment in two axis planes. Glass cover included. Reflector beams available: 15°, 30°, 45° and 60°. Maximum power is 37W

LUMINAIRE

Controller

MacAdam

Weight 1,1 [kg]

Protection rating IP , IK , class IP 20, IK 3,

Luminaire colour GREY

Cover Glass

Operating voltage 220-240V 50-60Hz

Note: All data are typical values. Tolerance of measurements +/-10% System features may change with product improvements due to technical advances.

OPTIONS

RAL colours on inquiry, honeycomb louver on inquiry , Casambi on inquiry, DALI on inquiry, Phase-cut dimming on inquiry.



Generated: 18.05.2024



+48 32 388 80 00



www.cora.pl cora@cora.pl



Street: Ignatza Hakuby 18 41-914 Bytom, Polska